



GREENBALL[®]

CATALOG 2021



**TIRES FOR THE
ROAD, WORK,
AND PLAY**

NEW



ARMOR HOG ATX

12-PLY RATED ALL-STEEL CONSTRUCTION • DESIGNED FOR HEAVY-DUTY TOWING
SEE PAGE 2



TERRA COMMANDER RTX

RUGGED OFF-ROAD LOOK • COMFORTABLE RIDE / LOW NOISE
SEE PAGE 4



DIRT COMMANDER 2.0

NEW SXS RADIAL • SQUARE SHOULDER DESIGN
SEE PAGE 36

LIGHT TRUCK RADIAL	2-15
SPECIAL TRAILER RADIAL	16-18
SPECIAL TRAILER RADIAL ASSEMBLIES	19
SPECIAL TRAILER BIAS	20-21
LPT/MOBILE HOME	22
ST BIAS TIRE AND WHEEL ASSEMBLIES	23
STEEL AND ALUMINUM SPECIAL TRAILER WHEELS	24-25
LAWN AND GARDEN	26-28
GOLF CART	29-30
GOLF CART TIRE AND WHEEL ASSEMBLIES	31
ATV/UTV TIRES	32-47



GREENBALL®
TIRES FOR THE ROAD, WORK, AND PLAY



KANATI®
QUALITY PERFORMANCE TIRES




KANATI®

ARMOR HOG ATX

HEAVY DUTY

ALL-STEEL CONSTRUCTION

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
17	LA1723580F	LT235/80R17	12PR/LRF	18	31.9	9.2 on 6.5	6.0 - 7.5	58.2	95	123/120Q	3415/3085
	LA1724570F	LT245/70R17	12PR/LRF	18	30.7	9.7 on 7.0	6.5 - 8.0	57.4	95	122/119Q	3305/3000
	LA1724575F	LT245/75R17	12PR/LRF	18	31.6	9.7 on 7.0	6.5 - 7.5	59.5	95	124/121Q	3525/3195
	LA1726570F	LT265/70R17	12PR/LRF	18	31.8	10.71 on 8	7.0 - 8.5	62.7	95	126/123Q	3750/3415
	LA1728570F	LT285/70R17	12PR/LRF	18	32.9	11.5 on 8.5	7.5 - 9.0	68.5	95	129/126Q	4080/3750
	LA1729570F	LT295/70R17	12PR/LRF	18	33.4	11.7 on 8.5	7.5 - 10.0	71.2	95	129/126Q	4080/3750
	LA1730570F	LT305/70R17	12PR/LRF	18	34	12.2 on 9	8.0 - 9.5	75.1	80	129/126Q	4080/3750
	LA1731570F	LT315/70R17	12PR/LRF	18	34.5	12.7 on 9.5	8.0-11.0	77.6	80	129/126Q	4080/3750
	LA1733125F	33x12.50R17LT	12PR/LRF	18	32.7	12.5 on 10	8.5 - 11.0	72.9	80	124Q	3525
	LA1735125F	35x12.50R17LT	12PR/LRF	18	34.7	12.5 on 10	8.5 - 11.0	77.9	80	129Q	4080
	LA1737125F	37x12.50R17LT	12PR/LRF	18	36.7	12.5 on 10	8.5 - 11.0	85.8	80	129Q	4080
18	LA1826570F	LT265/70R18	12PR/LRF	18	32.7	10.7 on 8	7.0 - 9.0	66.6	95	127/124Q	3860/3525
	LA1827565F	LT275/65R18	12PR/LRF	18	32.2	10.9 on 8	7.5 - 9.0	65.6	95	127/124Q	3860/3525
	LA1827570F	LT275/70R18	12PR/LRF	18	33.3	10.9 on 8	7.0 - 9.0	69.0	95	129/126Q	4080/3750
	LA1828570F	LT285/70R18	12PR/LRF	18	33.9	11.5 on 8.5	7.5-9.5	72.7	95	129/126Q	4080/3750
	LA1829570F	LT295/70R18	12PR/LRF	18	34.4	11.7 on 8.5	8.0-10.0	75.1	95	129/126Q	4080/3750
	LA1830570F	LT305/70R18	12PR/LRF	18	35	12.2 on 9	8.5 - 10.0	79.4	80	129/126Q	4080/3750
	LA1835125F	35x12.50R18LT	12PR/LRF	18	34.7	12.5 on 10	8.5 - 11.0	78.9	80	128Q	3970
	LA1837125F	37x12.50R18LT	12PR/LRF	18	36.7	12.5 on 10	8.5 - 11.0	84.9	80	128Q	3970
20	LA2026560F	LT265/60R20	12PR/LRF	18	32.7	10.7 on 8	7.5 - 9.5	67.0	95	125/122Q	3640/3305
	LA2027560F	LT275/60R20	12PR/LRF	18	33.3	10.9 on 8	7.5 - 9.5	69.1	95	127/124Q	3860/3525
	LA2027565F	LT275/65R20	12PR/LRF	18	34.3	10.9 on 8	7.5 - 9.5	71.3	95	129/126Q	4080/3750
	LA2028560F	LT285/60R20	12PR/LRF	18	33.8	11.5 on 8.5	8.0 - 10.0	72.6	95	129/126Q	4080/3750
	LA2029560F	LT295/60R20	12PR/LRF	18	34.3	11.7 on 8.5	8.0 - 10.0	76.4	95	129/126Q	4080/3750
	LA2032560F	LT325/60R20	12PR/LRF	18	35.4	13 on 9.5	9.0 - 12.0	84.8	80	129/126Q	4080/3750
	LA2033125F	33x12.50R20LT	12PR/LRF	18	32.7	12.5 on 10	8.5 - 11.0	73.3	80	119Q	3000
	LA2035125F	35x12.50R20LT	12PR/LRF	18	34.7	12.5 on 10	8.5-11	77.0	80	125Q	3640
	LA2037125F	37x12.50R20LT	12PR/LRF	18	36.7	12.5 on 10	8.5 - 11.0	84.9	80	128Q	3970

Built to support HD applications, the Kanati Armor Hog ATX is the industry's first All-Steel 12-ply rated light truck tire. The strong All-Steel casing provides increased load capacity for heavy-duty towing and payloads, while delivering superior impact and puncture resistance. Featuring an aggressive looking all-terrain tread pattern, the ATX provides plenty of traction to handle a wide variety of terrains, while its variable pitch technology helps reduce road noise for a comfortable ride on the highway.



- **12-PLY RATED ALL-STEEL CONSTRUCTION**
FOR HEAVY-DUTY TOWING AND PAYLOADS
- **AGGRESSIVE LOOKING ALL-TERRAIN TREAD**
FOR EXCELLENT TRACTION IN A VARIETY OF TERRAINS
- **OPTIMIZED VOID RATIO**
FOR A QUIET AND COMFORTABLE RIDE
- **STRONG SIDEWALL CONSTRUCTION**
PROVIDES SUPERIOR IMPACT AND PUNCTURE RESISTANCE




KANATI®

TERRA COMMANDER RTX

STREET PERFORMANCE
RUGGED OFF-ROAD LOOK

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
17	LRX1723580E	LT235/80R17	10PR/LRE	16.5	31.8	9.3	6.5	48.0	80	120/117Q	3085/2835
	LRX1724570E	LT245/70R17	10PR/LRE	16.5	30.6	9.8	7.0	49.7	80	119/116Q	3000/2755
	LRX1724575E	LT245/75R17	10PR/LRE	16.5	31.5	9.8	7.0	51.8	80	121/118Q	3195/2910
	LRX1726570E	LT265/70R17	10PR/LRE	16.5	31.7	10.7	8.0	52.0	80	121/118Q	3195/2910
	LRX1728570E	LT285/70R17	10PR/LRE	16.5	32.8	11.5	8.5	56.9	80	121/118Q	3195/2910
	LRX1729570E	LT295/70R17	10PR/LRE	16.5	33.3	11.8	8.5	61.7	80	121/118Q	3195/2910
	LRX1730570E	LT305/70R17	10PR/LRE	16.5	33.9	12.3	9.0	65.9	80	121/118Q	3195/2910
	LRX1733125E	33X12.50R17LT	10PR/LRE	18.9	32.8	12.5	10.0	63.6	80	120Q	3085
18	LRX1826570E	LT265/70R18	10PR/LRE	16.5	32.6	10.7	8.0	54.6	80	124/121Q	3525/3195
	LRX1827565E	LT275/65R18	10PR/LRE	16.5	32.1	11.0	8.0	55.3	80	123/120Q	3415/3085
	LRX1827570E	LT275/70R18	10PR/LRE	16.5	33.2	11.0	8.0	57.4	80	125/122Q	3640/3305
	LRX1828570E	LT285/70R18	10PR/LRE	16.5	33.8	11.5	8.5	63.0	80	127/124Q	3860/3525
20	LRX2026560E	LT265/60R20	10PR/LRE	16.5	32.5	10.7	8.0	55.4	80	121/118Q	3195/2910
	LRX2027560E	LT275/60R20	10PR/LRE	16.5	33.0	11.0	8.0	56.7	80	123/120Q	3415/3085
	LRX2027565E	LT275/65R20	10PR/LRE	16.5	34.1	11.0	8.0	59.8	80	126/123Q	3750/3415
	LRX2028560E	LT285/60R20	10PR/LRE	16.5	33.5	11.5	8.5	60.5	80	125/122Q	3640/3305
	LRX2033125E	33X12.50R20LT	10PR/LRE	18.9	32.8	12.5	10.0	63.5	80	114Q	2600

COMING SOON

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
17	LRX1731570E	LT315/70R17	10PR/LRE	16.5	34.4	12.7	9.5	67.9	80	121/118Q	3195/2910
	LRX1735125E	35X12.50R17LT	10PR/LRE	18.9	34.8	12.5	10.0	68.6	80	121Q	3195
	LRX1737125E	37X12.50R17LT	10PR/LRE	18.9	36.8	12.5	10.0	75.5	80	124Q	3525
18	LRX1829570E	LT295/70R18	10PR/LRE	16.5	34.3	11.8	8.5	66.4	80	129/126Q	4080/3750
	LRX1830570E	LT305/70R18	10PR/LRE	16.5	34.8	12.2	9.0	65.8	80	126/123Q	3750/3415
	LRX1835125E	35X12.50R18LT	10PR/LRE	18.9	34.8	12.5	10.0	70.3	80	123Q	3415
	LRX1837125E	37X12.50R18LT	10PR/LRE	18.9	36.8	12.5	10.0	77.2	80	128Q	3970
20	LRX2029560E	LT295/60R20	10PR/LRE	16.5	33.9	11.8	8.5	66.7	80	126/123Q	3750/3415
	LRX2032560E	LT325/60R20	10PR/LRE	16.5	35.4	13.0	9.5	74.5	80	126/123Q	3750/3415
	LRX2035125E	35X12.50R20LT	10PR/LRE	18.9	34.8	12.5	10.0	69.1	80	121Q	3195
	LRX2037125E	37X12.50R20LT	10PR/LRE	18.9	36.8	12.5	10.0	75.7	80	126Q	3750

The Terra Commander RTX is the perfect companion for drivers looking for a tire that can comfortably cruise the open highway and navigate light off-road conditions. The tread design of the Terra Commander features closely placed lugs that allow greater contact on the road for a smooth ride and less road noise. Stone ejectors between the lugs help remove stubborn rocks and other debris, while the siped lugs provide extra flex and grip when adventuring off the beaten path. Combined with its broad shoulders and aggressive sidewall, the RTX gives your vehicle a rugged off-road look that others will envy. This new tire from Kanati is more than capable of getting you through your daily excursions and back, all you have to do is decide which direction to travel.



- **OPTIMIZED VOID RATIO**
FOR A COMFORTABLE RIDE AND LOW NOISE
- **3-PLY SIDEWALLS**
FOR ADDED STRENGTH AND STABILITY
- **AGGRESSIVE SIDEWALL AND SHOULDER LUGS**
FOR A RUGGED OFF-ROAD LOOK
- **STONE EJECTORS**
PROVIDE EASY CLEAN-OUT BETWEEN LUGS




KANATI®

MUD HOG M/T

DESIGNED FOR OFF-ROAD PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
15	L1531105C-252*	31X10.50R15LT	6PR/LRC	19	30.7	10.9 on 8.5	7-9	47.5	50	109Q	2270
	L1535105C-252*	LT35X10.50R15	6PR/LRC	20	34.7	10.5 on 8.0	10	62.0	50	118Q	2910
	L1535125C-252*	35X12.50R15LT	6PR/LRC	20	34.8	12.5 on 10.0	8.5-11	62.1	35	113Q	2535
16	L1623585E-252	LT235/85R16	10PR/LRE	18	32.0	9.3 on 6.5	6-7.5	50.9	80	120/116Q	3042/2778
	L1624575E-252	LT245/75R16	10PR/LRE	18	30.7	9.8 on 7.0	6.5-8	49.9	80	120/116Q	3042/2778
	L1626575E-252	LT265/75R16	10PR/LRE	18	31.9	10.5 on 7.5	7-8	54.2	80	123/120Q	3415/3085
	LH1628575E-252	LT285/75R16	10PR/LRE	19	33.0	11.3 on 8.0	7.5-9	60.1	80	126/123Q	3750/3415
	LH1630570E-252	LT305/70R16	10PR/LRE	20	33.1	12.2 on 9.0	8-9.5	64.8	65	124/121Q	3525/3195
	L1631575D-252*	LT315/75R16	8PR/LRD	20	34.8	12.3 on 8.5	8-11	63.7	50	121/118Q	3195/2910
17	L1726570E-252	LT265/70R17	10PR/LRE	18	31.9	10.7 on 8.0	7-8.5	54.2	80	121/118Q	3195/2910
	L1728570E-252	LT285/70R17	10PR/LRE	19	33.0	11.5 on 8.5	7.5-9	61.3	80	123/120Q	3465/3120
	L1729570E-252	LT295/70R17	10PR/LRE	19	33.5	11.8 on 8.5	7.5-10	60.9	80	121/118Q	3195
	L1730570E-252	LT305/70R17	10PR/LRE	19	34.1	12.3 on 9.0	8-9.5	65.0	80	121/118Q	3195
	L1731570E-252	LT315/70R17	10PR/LRE	19	34.6	12.7 on 9.5	8-11	65.6	80	121/118Q	3195
	L1733125E-252	33X12.50R17LT	10PR/LRE	19	32.8	12.5 on 10.0	8.5-11	59.9	80	120Q	3085
	L1735125E-252	35X12.50R17LT	10PR/LRE	20	34.8	12.5 on 10.0	8.5-11	64.3	80	121Q	3195
	L1737125E-252	37X12.50R17LT	10PR/LRE	19	36.8	12.5 on 10.0	8.5-11	72.8	80	124Q	3525
	L1739125E-252	39X12.50R17LT	10PR/LRE	21	38.8	12.8 on 10.0	8.5-11	85.0	65	128Q	3970
18	L1827565E-252	LT275/65R18	10PR/LRE	20	32.3	11.0 on 8.0	7.5-9	57.0	80	123/120Q	3415/3085
	L1827570E-252	LT275/70R18	10PR/LRE	19	33.4	10.9 on 8.0	7-8.5	59.0	80	125/122Q	3640/3305
	LH1830570E-252	LT305/70R18	10PR/LRE	20	35.1	12.2 on 9.0	8-10	67.4	80	126/123Q	3750/3415
	L1833125E-252	33X12.50R18LT	10PR/LRE	20	32.6	12.6 on 10.0	10	62.2	80	118Q	2910
	L1835125E-252	35X12.50R18LT	10PR/LRE	20	34.8	12.6 on 10.0	10	67.1	80	123Q	3415
20	L2027560E-252	LT275/60R20	10PR/LRE	20	33.0	11.0 on 8.0	9	59.1	80	123/120Q	3415/3085
	L2027565E-252	LT275/65R20	10PR/LRE	19	34.3	11.9 on 8.0	7.5-9.5	60.0	80	126/123Q	3750/3415
	L2029560E-252	LT295/60R20	10PR/LRE	20	34.0	12.0 on 8.5	8-10	66.1	80	126/123Q	3750/3415
	L2033125E-252	33X12.50R20LT	10PR/LRE	19	32.7	12.5 on 10.0	8.5-11	61.4	80	114Q	2600
	L2035125E-252	35X12.50R20LT	10PR/LRE	20	35.0	12.5 on 8.5	8.5-11	66.6	80	121Q	3195
	L2037125E-252	37X12.50R20LT	10PR/LRE	20	37.0	12.5 on 10.0	8.5-11	71.5	80	126Q	3750
	L2039135E-252	39X13.50R20LT	10PR/LRE	21	38.8	13.6 on 11.0	8.5-11	83.8	65	128Q	3970
	L2233125E-252	33X12.50R22LT	10PR/LRE	20	32.8	12.5 on 10.0	8.5-11	60.3	80	109Q	2270
22	L2235125E-252	35X12.50R22LT	10PR/LRE	20	34.7	12.5 on 10.0	8.5-11	66.2	80	117Q	2835
	L2237135E-252	37X13.50R22LT	10PR/LRE	20	36.8	13.6 on 11.0	8.5-11	75.0	80	123Q	3415
	L2239145E-252	39X14.50R22LT	10PR/LRE	21	38.8	14.6 on 12.0	10-12	87.0	65	128Q	3970

*2-ply sidewall construction

The Kanati Mud Hog sports an aggressive tread pattern that's ready to take on mother nature. Whether its conquering mud or crawling over rocks, the Mud Hog is engineered to push the limits of your off-road adventure. Featuring a large void ratio for easy clean-out and a wide footprint for superior traction and stopping power, you can dominate any terrain with confidence.



- **AGGRESSIVE ANGLED TREAD**
DELIVERS ENHANCED TRACTION IN OFF-ROAD CONDITIONS
- **3-PLY SIDEWALLS**
FOR INCREASED STRENGTH AND IMPACT RESISTANCE
- **OPTIMIZED VOID RATIO**
FOR SUPERIOR SELF-CLEANING ACTION
- **BUILT WITH RESILIENT RUBBER COMPOUNDS**
FOR EVEN TREAD WEAR AND DURABILITY




KANATI®

TRAIL HOG A/T-4

ALL-TERRAIN / ALL-WEATHER
SUPERIOR TRACTION

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
16	LTH1626575E	LT265/75R16	10PR/LRE	18	31.8	10.7 on 7.5	7-8	52.3	80	123/120Q	3415/3085
	LTH1628575E	LT285/75R16	10PR/LRE	18	32.9	11.5 on 8.0	7.5 - 9.0	52.3	80	126/123Q	3750/3415
17	LTH1723580E	LT235/80R17	10PR/LRE	18	31.9	9.2 on 6.5	6-7.5	48.2	80	120/117Q	3085/2835
	LTH1724570E	LT245/70R17	10PR/LRE	18	30.6	9.8 on 7	6.5-8.0	47.4	80	119/116Q	3000/2755
	LTH1724575E	LT245/75R17	10PR/LRE	18	31.6	9.8 on 7	6.5-7.5	49.2	80	121/118Q	3195/2910
	LTH1726570E	LT265/70R17	10PR/LRE	18	31.7	10.6 on 8	7-8.5	52.1	80	121/118Q	3195/2910
	LTH1728570E	LT285/70R17	10PR/LRE	18	32.8	11.5 on 8.5	7.5-9	57.0	80	123/120Q	3465/3120
	LTH1730570E	LT305/70R17	10PR/LRE	18	34.0	12.3 on 9	8-9.5	63.3	80	121/118Q	3195/2910
	LTH1731570E	LT315/70R17	10PR/LRE	18	34.5	12.7 on 9.5	8-9.5	65.4	80	121/118Q	3195/2910
	LTH1735125E	35X12.50R17LT	10PR/LRE	18	34.6	12.8 on 10	8.5-11	64.5	80	121Q	3195
18	LTH1737125E	37X12.50R17LT	10PR/LRE	18	36.7	13.0 on 10	8.5-11	72.5	80	124Q	3525
	LTH1826570E	LT265/70R18	10PR/LRE	18	32.7	10.7 on 8	7-9	54.3	80	124/121Q	3525/3195
	LTH1827565E	LT275/65R18	10PR/LRE	18	32.3	10.9 on 8	7.5-9	55.0	80	123/120Q	3415/3085
	LTH1827570E	LT275/70R18	10PR/LRE	18	33.4	10.9 on 8	7-8.5	57.3	80	125/122Q	3640/3305
	LTH1830570E	LT305/70R18	10PR/LRE	18	34.9	12.4 on 9	8.5-10	67.1	80	126/123Q	3750/3415
20	LTH1837125E	37X12.50R18LT	10PR/LRE	18	36.7	12.9 on 10	8.5-11	72.1	80	128Q	3970
	LTH2026560E	LT265/60R20	10PR/LRE	18	32.5	10.7 on 8	7.5-9.5	55.2	80	121/118Q	3195/2910
	LTH2027555E	LT275/55R20	10PR/LRE	18	32.0	11.2 on 8.5	7.5-9.5	55.5	80	120/117Q	3085/2835
	LTH2027560E	LT275/60R20	10PR/LRE	18	33.0	11 on 8	7.5-9.5	57.1	80	123/120Q	3415/3085
	LTH2027565E	LT275/65R20	10PR/LRE	18	34.3	10.8 on 8	7.5-9.5	59.2	80	126/123Q	3750/3415
	LTH2028560E	LT285/60R20	10PR/LRE	18	33.5	11.5 on 8.5	8-10	59.8	80	125/122Q	3640/3305
	LTH2030555E	LT305/55R20	10PR/LRE	18	33.3	12.4 on 9.5	8.5-10	63.4	80	121/118Q	3195/2910
	LTH2032560E	LT325/60R20	10PR/LRE	18	35.4	13.1 on 9.5	9-12	71.2	80	126/123Q	3750/3415
	LTH2035125E	35X12.50R20LT	10PR/LRE	18	34.7	12.5 on 10	8.5-11	66.6	80	121Q	3195
	LTH2037125E	37X12.50R20LT	10PR/LRE	18	36.7	12.7 on 10	8.5-11	71.3	80	126Q	3750

The Kanati Trail Hog is a true all-season tire featuring an all-terrain tread that can handle all types of weather and road conditions. From rocky terrains to snowy paths to wooded trails, the Trail Hog provides excellent traction and responsiveness for all your off-road and overland adventures. Its heavily siped lugs and rugged beveled shoulder blocks deliver extra biting edges for enhanced steering and control. Plus, the Trail Hog A/T is mountain snowflake rated and compatible with #16 winter studs for severe snow conditions.



■ **SNOW FLAKE RATED / #16 STUDS**
FOR GREATER TRACTION IN WINTER CONDITIONS



■ **TOUGH 3-PLY SIDEWALL CONSTRUCTION**
FOR DURABILITY

■ **AGGRESSIVE TREAD DESIGN**
FOR SUPERIOR TRACTION AND CONTROL

■ **OPTIMIZED VOID RATIO**
FOR SMOOTH AND QUIET RIDE




KANATI®

NAVPOINT HTX®

ALL-SEASON PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
16	LNV1622575E	LT225/75R16	10PR	16	29.3	8.8	6	40.2	80	115/112Q	2680/2470
	LNV1623585E	LT235/85R16	10PR	16	31.7	9.3	6.5	45.7	80	120/116R	3042/2756
	LNV1624575E	LT245/75R16	10PR	16	30.5	9.8	7	43.9	80	120/116S	3042/2756
	LNV1626575E	LT265/75R16	10PR	16	31.7	10.5	7.5	49.2	80	123/120R	3415/3085
	LNV1628575E	LT285/75R16	10PR	16	32.8	11.3	8	54.6	80	126/123R	3750/3415
17	LNV1723580E	LT235/80R17	10PR	16	31.8	9.3	6.5	45.9	80	120/117R	3085/2835
	LNV1724570E	LT245/70R17	10PR	16	30.6	9.8	7	45.0	80	119/116R	3000/2756
	LNV1724575E	LT245/75R17	10PR	16	31.5	9.8	7	46.20	80	121/118S	3195/2910
	LNV1725570SL	P255/70R17	SL	14	31.1	10.2	7.5	40.9	44	110T	2337
	LNV1726570E	LT265/70R17	10PR	16	31.7	10.7	8	49.6	80	121/118S	3195/2910
	LNV1728570E	LT285/70R17	10PR	16	32.8	11.5	8.5	55.8	80	121/118S	3195/2910
18	LNV1825565SL	255/65R18	SL	14	31.1	10.1	7.5	41.9	44	111T	2403
	LNV1826560SL	265/60R18	SL	14	30.5	10.7	8	41.8	44	110H	2335
	LNV1827565E	LT275/65R18	10PR	16	32.1	11.0	8	54.2	80	123/120S	3415/3085
	LNV1827570E	LT275/70R18	10PR	16	33.2	11.0	8	55.2	80	125/122R	3640/3305
20	LNV2025555XL	255/55R20	XL	14	31.0	10.4	8	44.1	50	110H	2337
	LNV2026560E	LT265/60R20	10PR	16	32.5	10.7	8	54.7	80	121/118S	3195/2910
	LNV2027555XL	275/55R20	XL	14	31.9	11.2	8.5	45.4	50	117H	2835
	LNV2027565E	LT275/65R20	10PR	16	34.1	11.0	8	57.6	80	126/123R	3750/3415
22	LNV2228545XL	285/45R22	XL	13	32.1	11.2	9.5	42.9	50	114H	2601

The new **KANATI NAVPOINT HTX** is a superior all-season highway-terrain tire made for light trucks, SUVs, and CUVs. With performance siping built in, the Navpoint HTX delivers extra flex and biting edges for enhanced grip and improved handling in adverse weather conditions. Two large circumferential grooves help expel water for increased traction on wet surfaces. Suitable for everyday driving and long-distance travel, the Navpoint HTX provides a smooth ride, excellent traction, and greater responsiveness in a variety of driving conditions.



- **CIRCUMFERENTIAL GROOVES**
FOR IMPROVED WATER EXPULSION
- **AGGRESSIVE CENTER TREAD**
FOR INCREASED TRACTION IN ADVERSE CONDITIONS
- **MULTIPLE ANGLED GROOVES**
FOR ENHANCED TRACTION IN WATER OR SNOW
- **CLOSED SHOULDER DESIGN**
FOR RELIABLE HANDLING AND GREATER STABILITY





DIRT COMMANDER M/T

BUILT TOUGH FOR ANY DESTINATION

Wheel Diameter	Item	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
15	TCD1523575C	LT235/75R15	6PR/LRC	18	29.1	9.0	6.5	37.6	50	104/101Q	1984/1819
	TCD1531105C	31X10.50R15LT	6PR/LRC	17	30.7	10.5	8.5	47.1	50	109Q	2271
	TCD1533125C	33X12.50R15LT	6PR/LRC	19	32.8	12.5	10.0	59.6	35	108Q	2205
16	TCD1623585E	LT235/85R16	10PR/LRE	16	31.7	9.3	6.5	45.4	80	120/116N	3086/2756
	TCD1624575E	LT245/75R16	10PR/LRE	15	30.5	9.5	7.0	43.9	80	120/116N	3086/2756
	TCD1626575E	LT265/75R16	10PR/LRE	16	31.9	10.1	7.5	46.5	80	123/120N	3417/3086
	TCD1628575E	LT285/75R16	10PR/LRE	17	33.1	11.3	8.0	51.9	80	126/123N	3748/3417
17	TCD1723580E	LT235/80R17	10PR/LRE	18	32.0	9.4	6.5	45.5	80	120/117Q	3086/2833
	TCD1724575E	LT245/75R17	10PR/LRE	18	31.7	9.5	7.0	45.3	80	121/118Q	3195/2910
	TCD1726570E	LT265/70R17	10PR/LRE	16	31.9	10.9	8.0	49.7	80	121/118Q	3195/2910
	TCD1728570E	LT285/70R17	10PR/LRE	17	33.0	11.3	8.5	54.1	80	121/118Q	3195/2910
	TCD1729570E	LT295/70R17	10PR/LRE	17	33.5	11.8	8.5	58.7	80	121/118Q	3195/2910
	TCD1733125D	33X12.50R17LT	8PR/LRD	19	32.8	12.7	10.0	55.7	50	114Q	2601
	TCD1735125F	35X12.50R17LT	12PR/LRF	18	34.8	12.7	10.0	64.1	80	121Q	3195
18	TCD1827565E	LT275/65R18	10PR/LRE	18	32.3	10.9	8.0	51.2	80	123/120Q	3417/3086
	TCD1827570E	LT275/70R18	10PR/LRE	17	33.4	11.0	8.0	54.1	80	121/118Q	3195/2190
	TCD1833125F	33X12.50R18LT	12PR/LRF	19	32.8	12.5	10.0	62.3	80	122Q	3305
	TCD1835125F	35X12.50R18LT	12PR/LRF	18	34.8	12.5	10.0	66.7	80	128Q	3970
20	TCD2033125F	33X12.50R20LT	12PR/LRF	19	32.8	12.5	10.0	59.5	80	119Q	3000
	TCD2035125F	35X12.50R20LT	12PR/LRF	18	34.8	12.5	10.0	66.9	80	125Q	3640
	TCD2037125F	37X12.50R20LT	12PR/LRF	19	36.8	12.5	10.0	71.7	80	129Q	4080
22	TCD2233125F	33X12.50R22LT	12PR/LRF	19	32.8	12.5	10.0	58.7	80	114Q	2600
	TCD2235125F	35X12.50R22LT	12PR/LRF	18	34.8	12.5	10.0	64.7	80	121Q	3195
	TCD2237135F	37X13.50R22LT	12PR/LRF	19	36.8	13.6	11.0	77.7	80	127Q	3860

The **Dirt Commander M/T** is a quality mud-terrain tire featuring an aggressive tread for optimum traction in various rough terrains. Its rugged lugs are strategically laid out to give you a wide stance for greater stability, and the broad shoulder lugs provide extra protection and biting force to conquer challenging obstacles. With an optimized void ratio, the Dirt Commander M/T performs well on and off the road. Available in 24 popular sizes to fit pickup trucks, jeeps, and SUVs.



- **AGGRESSIVE TREAD PATTERN**
FOR OPTIMUM TRACTION IN VARIOUS ROUGH TERRAINS
- **BROAD SHOULDER LUGS**
PROVIDE SHOULDER PROTECTION AND EXTRA BITING EDGES
- **WIDE CONTACT PATCH**
FOR EVEN WEAR AND GREATER LONGEVITY
- **STONE EJECTORS**
FOR EFFICIENT CLEAR-OUT





TERRA TROOPER A/T

BUILT FOR A QUIET
AND SMOOTH RIDE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
15	TTC1531105C	31X10.50R15LT	6PR	15	30.5	10.6	7-9	47.7	50	109S	2270
16	TTC1621585F	LT215/85R16	12PR	14	30.4	8.5	5.5-7	39.6	95	119/116Q	3000/2755
	TTC1622575F	LT225/75R16	12PR	14	29.3	8.8	6-7	42.5	95	119/116Q	3000/2755
	TTC1623585F	LT235/85R16	12PR	15	31.7	9.3	6-7.5	44.8	95	123/120Q	3415/3085
	TTC1624575F	LT245/75R16	12PR	15	30.5	9.7	6.5-8	47.6	95	123/120Q	3415/3085
	TTC1626575F	LT265/75R16	12PR	15	31.7	10.5	7-8	48.8	95	126/123Q	3750/3415
	TTC1628575F	LT285/75R16	12PR	16	32.8	11.6	7.5-9	52.3	95	128/125S	3970/3640
17	TTC1723580F	LT235/80R17	12PR	16	31.8	9.3	6-7.5	46.2	95	121/118S	3195/2910
	TTC1724570F	LT245/70R17	12PR	16	30.8	9.8	7	46.5	95	121/118S	3195/2910
	TTC1726570F	LT265/70R17	12PR	16	31.7	10.7	7-8.5	51.4	95	124/121S	3525/3195
	TTC1728570F	LT285/70R17	12PR	16	32.8	11.5	7.5-9	53.4	95	126/123S	3750/3415
18	TTC1827565F	LT275/65R18	12PR	16	32.1	11.0	7.5-9	53.2	95	126/123S	3750/3415
	TTC1827570F	LT275/70R18	12PR	16	33.4	11.0	8	54.6	95	128/125S	3970/3640
	TTC1828565F	LT285/65R18	12PR	16	32.8	11.5	8.5	53.0	95	128/125S	3970/3640
20	TTC2027565F	LT275/65R20	12PR	16	34.3	11.0	8	58.1	95	128/125S	3970/3640

The **Centennial Terra Trooper** is an all-terrain light truck tire built for drivers who spend most of their time on the highway and enjoy some light off-roading. Engineered for all-season performance, you can feel confident in dry, wet, and light snow conditions. The tread features large grooves to help expel water, while the heavily siped tread blocks provide the flexibility needed for greater control and traction. The Terra Trooper A/T is an excellent choice for older and newer pickup trucks, SUVs, and jeeps alike.



■ **AGGRESSIVE ALL-TERRAIN TREAD DESIGN**
FOR OPTIMUM TRACTION IN VARIOUS TERRAINS

■ **TOUGH STEEL-BELTED CONSTRUCTION**
FOR DURABILITY

■ **FULL SPIRAL NYLON OVERLAY**
FOR ADDED STRENGTH

■ **IMPROVED TREAD ANGLE**
FOR EXCELLENT TRACTION

■ **DESIGNED FOR LONG TREAD LIFE**

■ **M & S RATED**



TOW-MASTER ASC[®]

ALL-STEEL CONSTRUCTION SPECIAL TRAILER

- ALL STEEL BODY CONSTRUCTION PROVIDES DURABILITY UNDER HEAVY LOADS
- FIVE RIB DESIGN FOR BETTER FUEL ECONOMY AND EVEN WEAR
- STRONG CASING ADDS STRENGTH AND REDUCES TRAILER SWAY
- WIDE GROOVE DECREASE HYDROPLANING AND ROLLING RESISTANCE

15"

16"

TOW-MASTER ASC SPECIAL TRAILER RADIAL

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width Range	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches		Lbs.	Lbs.		Lbs.
15	THF1522575F	ST225/75R15	LRF	12.0	28.3	8.8	6J	46.2	95	121/117M	3195/2835
16	THF1623580G	ST235/80R16	LRG	11.9	30.8	9.2	6.5J	57.2	110	129/125L	4080/3640
	THF1623585G	ST235/85R16	LRG	11.3	31.7	9.3	6.5J	57.2	110	132/127L	4400/3860

HIWAYMASTER

- ALL-STEEL CONSTRUCTION PROVIDES ENHANCED STRENGTH AND GREATER DURABILITY

HIWAY MASTER ASC SPECIAL TRAILER RADIAL

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width Range	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/Inch	Inches	Inches		Lbs.	Lbs.		Lbs.
16	TDF1623580G	ST235/80R16	LRG	9.5	30.8	9.3	6.5J	55	110	129/125L	4080

TOW-MASTER®

ENGINEERED FOR IMPROVED PERFORMANCE AND DURABILITY

■ LOW-ROLLING RESISTANCE
FOR INCREASED FUEL EFFICIENCY

■ SPEED RATED
FOR UP TO 81 MPH

■ DUAL STEEL BELTS AND
AND REINFORCED BELT-EDGE PACKAGE
FOR STRENGTH AND DURABILITY

■ VERSATILE
FITS A LARGE VARIETY OF BOAT, HORSE,
FIFTH WHEELS, CARGO, TRAVEL TRAILERS
AND MORE

Greenball's Tow-Master is one of America's most trusted trailer tire. Designed for performance and reliability, the Tow-Master fits a wide range of boat trailers, fifth wheels, toy haulers and more.

TOW-MASTER SPECIAL TRAILER RADIAL

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
13	TR13175C	ST175/80R13	LRC	9	24.0	7	5J	15.5	50	91/87M	1360/1200
14	TR14205D	ST205/75R14	LRD	10	27.1	8	5.5J	21.8	65	105/101M	2040/1820
	TR14215D	ST215/75R14	LRD	10	26.7	8.5	6J	23.4	65	108/103M	2200/1930
15	TR15205D	ST205/75R15	LRD	10	27.1	8	5.5J	23.5	65	107/102M	2150/1870
	TR15225E	ST225/75R15	LRE	10	28.3	8.8	6J	28.0	80	117/112M	2830/2470
16	TR16235E	ST235/80R16	LRE	10	30.8	9.3	6.5J	32.6	80	124/120M	3520/3080
	TR1623585F	ST235/85R16	LRF	10	31.7	9.3	6.5J	37.6	95	128/124M	3960/3250

OUR ECONOMICAL SPECIAL TRAILER TIRE LINES

TRANSmaster EV[®]

- HIGH QUALITY, SOLID CONSTRUCTION
- RADIAL DESIGN
- SPEED RATED M
- FOUR CIRCUMFERENTIAL GROOVES FOR BETTER WATER EVACUATION AND TRACTION

TRANSMaster EV SPECIAL TRAILER RADIAL

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
13	TF13175C	ST175/80R13	LRC	9	24.0	7	5J	15.5	50	91/87M	1360/1200
14	TF14205D	ST205/75R14	LRD	10	27.1	8	5.5J	21.8	65	105/101M	2040/1820
15	TF15205D	ST205/75R15	LRD	10	27.1	8	5.5J	23.5	65	107/102M	2150/1870
	TF15225E	ST225/75R15	LRE	10	28.3	8.8	6J	28.0	80	117/112M	2830/2470
16	TF16235E	ST235/80R16	LRE	10	30.8	9.3	6.5J	32.6	80	124/120M	3520/3080
	TF1623585F	ST235/85R16	LRF	10	31.7	9.3	6.5J	37.7	95	128/124M	3960/3520

MIRAGE

- DEPENDABLE TOWING PERFORMANCE AND TRACTION
- FOR USE ON A WIDE VARIETY OF BOAT, UTILITY, FIFTH WHEEL, TRAVEL, HORSE, UTILITY TRAILERS AND MORE

MIRAGE SPECIAL TRAILER RADIAL

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
13	TMG14205D	ST205/75R14	LRD	10	27.1	8.0	5.5J	21.8	65	105/101M	2040/1820
14	TMG15205D	ST205/75R15	LRD	10	27.1	8.0	5.5J	23.4	65	107/102M	2150/1870
15	TMG15225E	ST225/75R15	LRE	10	28.3	8.8	6.0J	28.4	80	117/112M	2830/2470

TRAILER TIRE ASSEMBLIES



TOW-MASTER ASC (ALL-STEEL CONSTRUCTION) ASSEMBLIES

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity
					Inches			Lbs.	Lbs.
15	THF1522575F-22656655B	ST225/75R15	LRF	SPOKE	SATIN BLACK	15X6	6-5.5	70.0	3195
16	THF1623585G-WH1608MWH	ST235/85R16	LRG	MODULAR	WHITE	16X6	8-6.5	90.2	4400

TOW-MASTER SPECIAL TRAILER RADIAL ASSEMBLIES

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity
					Inches			Lbs.	Lbs.
15	TR15225E-WS1566MW	ST225/75R15	LRE	MODULAR	WHITE	15X6	6-5.5	49.9	2830
16	TR16235E-WS1606SW	ST235/80R16	LRE	SPOKE	WHITE	16X6	6-5.5	61.6	3520

TRANSMASTER EV SPECIAL TRAILER RADIAL ASSEMBLIES

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity
					Inches			Lbs.	Lbs.
15	TF15225E-WS1566MW	ST225/75R15	LRE	MODULAR	WHITE	15X6	6-5.5	49.9	2830
16	TF16235E-WS1606SW	ST235/80R16	LRE	SPOKE	WHITE	16X6	6-5.5	61.6	3520

MIRAGE SPECIAL TRAILER RADIAL ASSEMBLIES

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity
					Inches			Lbs.	Lbs.
15	TMG15205D-WS1566MW	ST205/75R15	LRD	MODULAR	WHITE	15X6	6-5.5	45.4	2150
16	TMG15225E-WS1566MW	ST225/75R15	LRE	MODULAR	WHITE	15X6	6-5.5	49.7	2830

TOW-MASTER SPECIAL TRAILER BIAS



TOW-MASTER SPECIAL TRAILER BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Pattern	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
					32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	T0856E	4.80-8	LRC	S380	7.0	16.5	4.9	3.75	5.1	90	760



TOW-MASTER SPECIAL TRAILER BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Pattern	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
					32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	T0864E	5.70-8	LRC	S378	9.0	18.3	5.6	3.75	8.1	75	910
	T0865E	5.70-8	LRC	S378	6.8	18.6	5.5	3.75	8.0	100	1070
12	T1214E	4.80-12	LRC	S378	9.0	20.8	5.0	4.00	8.7	90	990
	T1228E	5.30-12	LRC	S378	9.0	21.9	5.4	4.00	10.1	80	1045



TOW-MASTER SPECIAL TRAILER BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Pattern	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
					32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	T0874E	18.5X8.50-8	LRC	S368	7.6	18.2	8.4	7.00	11.1	50	940
	T0890E	16.5X6.50-8	LRC	S368	6.6	16.3	6.6	5.375	8.1	70	795
10	T1026E	20.5X8.00-10	LRC	S368	10.0	20.6	7.8	6.00	14.5	50	1105
	T1028E	20.5X8.00-10	LRC	S368	10.0	20.8	7.8	6.00	14.3	70	1330
	T1030E	20.5X8.00-10	LRC	S368	10.0	20.8	7.8	6.00	16.3	90	1535
	T1032E	20.5X8.00-10	LRC	S368	10.0	20.6	7.8	6.00	17.8	110	1735

TOW-MASTER SPECIAL TRAILER BIAS

TOW-MASTER SPECIAL TRAILER BIAS											
Wheel Diameter	Part Number	Size	Ply Rating	Tread Pattern	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity Single/Dual
					32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
13	T1316C	ST175/80D13	LRC	HT326	8	24.0	6.8	5	15.4	50	1360/1200
14	T1415C	ST205/65D14	LRC	HT326	11	24.4	7.6	5	20.0	50	1760
	T1424C	ST205/75D14	LRC	HT326	10	25.5	7.6	5-6	19.2	50	1760/1570
15	T1516C	ST205/75D15	LRC	HT326	10	27.0	7.2	5.5-6	20.5	50	1820/1610
	T1528C	ST225/75D15	LRD	HT326	11	28.1	8.2	6-7	25.4	65	2540/2200

TOW-MASTER SPECIAL TRAILER BIAS											
Wheel Diameter	Part Number	Size	Ply Rating	Tread Pattern	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
					32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	T1222C	22.5X8.00-12	LRF	HT332	10	22.5	8.7	6	21	110	1980



SPECIAL TRAILER BIAS AND MOBILE HOME

HIWAY MASTER ST BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
15	ST15700E	ST205/90D15	LRE	12	29.5	7.9	5.5F	30.9	80	2910/2540
16	ST16750E	ST225/90D16	LRE	12	31.7	8.5	6G	35.1	75	3440/3020

HIWAY MASTER LPT BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
14.5	L1459G	9-14.5	LRG	14	28.3	9.9	7	33.9	115	3500

TOW-MASTER LPT BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
14.5	L1479C	7-14.5 ST	LRF	7.6	26.8	7.6	6	22.5	100	2335
	L1458C	8-14.5 ST	LRG	7.5	27.8	8.0	6	23.0	115	3100

HOMASTER MOBILE HOME BIAS

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
14.5	H1436R	8-14.5	LRH	9	26.5	7.5	6	21.7	115	3500
	HLS14GS	215/60D14.5	LRG	9	24.3	8.0	6	22.0	110	3100

TRAILER TIRE ASSEMBLIES

TOW-MASTER BIAS TRAILER ASSEMBLIES - STAMPED WHITE

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity
						Inches		Lbs.	Lbs.
8	T0874E-W8704W	18.5X8.50-8	LRC	STAMP	WHITE	8X7	4-4	17.1	940
	T0874E-W8705W	18.5X8.50-8	LRC	STAMP	WHITE	8X7	5-4.5	17.1	940
	T0890E-W8504RW	16.5X6.50-8	LRC	STAMP	WHITE	8X5.375	4-4	13.1	795

TOW-MASTER BIAS TRAILER ASSEMBLIES - SPOKE WHITE

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity Single/Dual
						Inches		Lbs.	Lbs.
12	T1214E-WS1244SW	4.80-12	LRC	SPOKE	WHITE	12X4	4-4	18.7	990
	T1214E-WS1245SW	4.80-12	LRC	SPOKE	WHITE	12X4	5-4.5	18.9	990
	T1228E-WS1244SW	5.30-12	LRC	SPOKE	WHITE	12X4	4-4	20.1	1045
	T1228E-WS1245SW	5.30-12	LRC	SPOKE	WHITE	12X4	5-4.5	20.1	1045
14	T1424C-WS1455SW	ST205/75D14	LRC	SPOKE	WHITE	14X5.5	5-4.5	37.4	1760/1570
15	T1516C-WS1555SW	ST205/75D15	LRC	SPOKE	WHITE	15X5	5-4.5	38.6	1820/1610

TOW-MASTER BIAS TRAILER ASSEMBLIES - MODULAR WHITE

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity Single/Dual
						Inches		Lbs.	Lbs.
14	T1424C-WS1455MW	ST205/75D14	LRC	MODULAR	WHITE	14X5.5	5-4.5	37.8	1760/1570
15	T1516C-WS1566MW	ST205/75D15	LRC	MODULAR	WHITE	15X6	6-5.5	42.1	1820/1610

HIWAY MASTER BIAS TRAILER ASSEMBLIES - MODULAR WHITE

Wheel Diameter	Part Number	Size	Load Range	Style	Color	Wheel Size	Bolt Pattern	Weight	Load Capacity Single/Dual
						Inches		Lbs.	Lbs.
15	T1516M-WS1566MW	ST205/75D15	LRC	MODULAR	WHITE	15X6	6-5.5	41.3	1820/1610



MODULAR



MOBILE HOME

STEEL SPECIAL TRAILER WHEEL - MODULAR

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
14	WS1455MW	14X5.5	WHITE	MODULAR	5-4.5	3.19	0	18	1870
15	WS1555MW	15X5	WHITE	MODULAR	5-4.5	3.19	0	19	1870
	WS1566MW	15X6	WHITE	MODULAR	6-5.5	4.28	0	21.9	2850

STEEL HEAVY-DUTY SPECIAL TRAILER WHEEL - MODULAR

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
16	WH1608MWH	16X6	WHITE	MODULAR	8-6.5	5.15	0	33.0	4400
	WS1608MWH	16X6	WHITE	MODULAR	8-6.5	5.15	0	31.2	4080
	WY1608MWH	16X6	WHITE	MODULAR	8-6.5	5.15	0	26.6	4080

MOBILE STEEL TRAILER WHEEL

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
14	WS600	14.5X6	BLACK	MOBILE HOME	N/A	N/A	0	14	3200



ALMOND STAMPED



WHITE STAMPED

STEEL SPECIAL TRAILER WHEEL - STAMPED

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
8	W0804W	8X3.75	WHITE	STAMPED	4-4	2.81	1.875+1.875	4.5	1075
	W0805W	8X3.75	WHITE	STAMPED	5-4.5	2.81	1.875+1.875	4.3	1075
	W8504RW	8X5.375	WHITE	STAMPED	4-4	2.81	2.6875+2.6875	5	900
	WR8505RW	8X5.375	WHITE	STAMPED	5-4.5	2.81	2.6875+2.6875	5	1165
	W8704W	8X7	WHITE	STAMPED	4-4	2.81	3.5+3.5	6	950
	W8704A	8X7	ALMOND	STAMPED	4-4	2.81	3.5+3.5	6	950
	W8705W	8X7	WHITE	STAMPED	5-4.5	2.81	3.5+3.5	6	950
10	WR1065RW	10X6	WHITE	STAMPED	5-4.5	2.81	0	10	1800



SPOKE

STEEL SPECIAL TRAILER WHEEL - SPOKE

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
12	WS1244SW	12X4	WHITE	SPOKE	4-4	2.65	0	9.95	1220
	WS1245SW	12X4	WHITE	SPOKE	5-4.5	3.19	0	10	1220
13	WS1345SW	13X4.5	WHITE	SPOKE	5-4.5	3.19	0	12.8	1660
14	WS1455SW	14X5.5	WHITE	SPOKE	5-4.5	3.19	0	17.6	1870
15	WS1565SW	15X6	WHITE	SPOKE	5-4.5	3.19	0	21.8	2600
16	WS1606SW	16X6	WHITE	SPOKE	6-5.5	4.28	0	29	3760
	WS1608SW	16X6	WHITE	SPOKE	8-6.5	5.15	0	30.3	3760



SATIN BLACK



MACHINE
GLOSS BLACK

ALUMINUM HEAVY DUTY TRAILER WHEEL

Wheel Diameter	Part Number	Size	Color	Style	Bolt Pattern	Center Bore	Offset	Weight	Load Capacity
						Inches	Inches	Lbs.	Lbs.
15	226-56655B	15x6	SATIN BLACK	SPOKE	6-5.5	4.13	0	24	3200
	226-56655M	15x6	MACHINE BLACK	SPOKE	6-5.5	4.13	0	24	3200
16	226-665865B	16x6.5	SATIN BLACK	SPOKE	8-6.5	4.92	0	27	4400
	226-665865M	16x6.5	MACHINE BLACK	SPOKE	8-6.5	4.92	0	27	4400

CAPS

Part Number	Description	Weight
		Lbs.
226-16CAPB	GLOSS BLACK CAPS FOR 16" 8 LUG	.50





LAWN AND GARDEN TIRES

ULTRA TURF LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
6	G63724S	15X6.00-6	4PR	6.3	14.7	6.1	4.5	5.2	30	570
8	G83716S	16X6.50-8	6PR	6.3	15.7	7.1	5.4	5.2	42	770
	G83726S	16X7.50-8	6PR	6.3	16.4	7.3	5.4	8.2	32	815
	G83746S	18X8.50-8	6PR	7.6	18.0	8.5	7.0	9.9	34	1050
	G83756S	18X9.50-8	6PR	8.2	18.7	9.3	7.0	10.5	36	1320
	G83776S	20X10.00-8	6PR	9.1	19.8	10.3	7.0	13.6	34	1540
10	G1036	20X10.00-10	6PR	10.0	19.7	9.6	8.0	15.8	32	1450



SOFT TURF LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
5	G5524S	11X4.00-5	4PR	4	10.5	3.9	2.5	2.9	46	330
6	G6724S	13X5.00-6	4PR	6	12.7	4.5	3.2	3.6	40	440
	G6942S	13X6.50-6	4PR	6	13.1	6.3	4.5	5.2	28	460
	G6562S	15X6.00-6	4PR	6	14.7	6.1	4.5	5.2	30	570
8	G8762S	16X6.50-8	4PR	9	16.2	6.3	5.4	6.3	28	620
	G8832S	18X8.50-8	4PR	9	18.0	8.6	7.0	9.9	22	814
	G8882S	18X9.50-8	4PR	9	18.5	9.0	7.0	12.0	24	1038
	G8514S	20X8.00-8	4PR	8	19.5	8.8	7.0	10.7	22	945
10	G1024S	20X10.00-10	4PR	8	20.0	9.4	8.0	13.2	22	1170

LAWN AND GARDEN TIRES



SAWTOOTH LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
4	G4424S	4.10/3.50-4	4PR	5	10.4	3.9	2.5	2.3	50	350
5	G5224S	4.10/3.50-5	4PR	5	11.7	3.7	3.2	2.5	50	380
6	G6324S	4.10/3.50-6	4PR	5	12.7	3.7	3.2	3.0	50	445



UNIVERSAL LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	T0868P	5.70-8	8PR	12	18.9	5.9	4.5	9.5	100	1075



STUD LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
4	G4224S	4.10/3.50-4	4PR	5	10.6	3.7	2.5	2.4	50	352
5	G5124S	4.10/3.50-5	4PR	5	11.7	3.8	3.7	3.0	50	380
6	G6124S	4.10/3.50-6	4PR	5	12.7	3.8	3.7	2.8	50	445
8	G8242S	4.80/4.00-8	4PR	7	16.2	4.8	3.7	4.6	50	670

LAWN AND GARDEN TIRES

RIB LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
5	G5544S	11X4.00-5	4PR	4	10.6	4.0	3.2	2.8	46	326
6	G6752S	13X5.00-6	4PR	4	12.4	4.6	3.5	3.2	40	440
	G6922S	13X6.50-6	4PR	5	12.8	5.9	4.2	5.2	28	308
	G6802S	15X6.00-6	4PR	5	14.4	6.0	4.2	5.0	30	352
8	G8802S	16X6.50-8	4PR	7	16.2	6.7	5.4	5.7	28	620
	G8842S	18X8.50-8	4PR	7	17.7	8.4	7.0	8.9	22	815
10	G1074	20X10.00-10	4PR	10	19.7	9.6	8.0	11.3	22	1170

WHEEL BARROW LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	G8142S	4.80/4.00-8	4PR	4	15.9	4.3	2.5	2.7	50	484
	G8182S	4.80/4.00-8	4PR	SMOOTH	16	8	2.5	3.0	50	670
	G8362S	3.50-8	2PR	4	15	3.5	2.5	2.0	50	320

TRANSMASTER L3 RIB FARM - TUBELESS LAWN AND GARDEN

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
6	G0616S	3.50-6	4PR	9	13.3	3.7	2.5	4.0	30	365
8	G0816S	3.50-8	4PR	9	14.4	3.7	2.5	4.7	30	430

GOLF CART TIRES



GREENSAVER PLUS GOLF CART

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	G8852V	18X8.50-8	4PR	9	17.7	8.3	7	9.9	22	815

All golf tires meet DOT standards.



GREENSAVER PLUS G/T GOLF CART

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	G0802	215/60-8	4PR	8.0	18.5	8.8	7	9.6	35	780
10	G1004	205/50-10	4PR	8.0	18.0	8.4	7	11.7	30	675
	G1005	205/65-10	4PR	9.0	20.0	8.3	7	11.8	35	910
12	G1206	205/30-12	4PR	8.6	17.7	7.6	7	9.5	12	465
	G1215	215/50-12	4PR	10.0	20.6	8.4	7	16.3	35	910
14	G1406	205/30-14	4PR	9.0	21.0	7.0	6	11.5	25	925

All golf tires meet DOT standards.

GOLF CART TIRES



GREENSAVER PLUS G/T PERFORMANCE RADIAL - GOLF CART

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	G1207	215/35R12	4PR	8	18.2	8	7	11	10/22	450/700

All golf tires meet DOT standards.



GREENSAVER SAWTOOTH GOLF CART

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	G8852D	18X8.50-8	4PR	8	17.9	8.1	7	10.0	22	815
	G8852R	18X8.50-8	4PR	8	18.0	8.5	7	8.9	22	815

All golf tires meet DOT standards.

GOLF CART TIRE AND WHEEL ASSEMBLIES

GOLF CART TIRE AND WHEEL ASSEMBLIES									
Wheel Diameter	Part Number	Size	Wheel Style	Wheel Finish	Wheel Size	Bolt Pattern	Load Range	Weight	Load Capacity
					Inches			Lbs.	Lbs.
SAWTOOTH									
8	G8852D-W8704W	18X8.50-8	STAMPED	WHITE	8X7	4-4	4PR	16.1	815
	G8852D-W8705W	18X8.50-8	STAMPED	WHITE	8X7	5-4.5	4PR	16.1	815
	G8852D-W8704A	18X8.50-8	STAMPED	ALMOND	8X7	4-4	4PR	16.1	815
	G8852R-W8704W	18X8.50-8	STAMPED	WHITE	8X7	4-4	4PR	14.9	815
	G8852R-W8705W	18X8.50-8	STAMPED	WHITE	8X7	5-4.5	4PR	14.9	815
	G8852R-W8704A	18X8.50-8	STAMPED	ALMOND	8X7	4-4	4PR	14.9	815
GREENSAVER PLUS									
8	G8852V-W8704W	18X8.50-8	STAMPED	WHITE	8X7	4-4	4PR	15.9	815
	G8852V-W8705W	18X8.50-8	STAMPED	WHITE	8X7	5-4.5	4PR	15.9	815
	G8852V-W8704A	18X8.50-8	STAMPED	ALMOND	8X7	4-4	4PR	15.9	815
GREENSAVER PLUS G/T									
8	G0802-W8704W	215/60-8	STAMPED	WHITE	8X7	4-4	4PR	15.6	780
	G0802-W8705W	215/60-8	STAMPED	WHITE	8X7	5-4.5	4PR	15.6	780
	G0802-W8704A	215/60-8	STAMPED	ALMOND	8X7	4-4	4PR	15.6	780

All golf tires meet DOT standards.



GREENSAVER PLUS



GREENSAVER PLUS G/T



TERRA MASTER

CUSTOMIZABLE SET UP FOR MAXIMUM PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122709TM	27X9.00R12	10PR/LRE	17.9	27.2 on 6.0	8.5	6-7	29.3	20	760
	AE122711TM	27X11.00R12	10PR/LRE	17.9	27.4 on 8.0	10.2	7-9	31.0	20	855
14	AE142610TM	26X10.00R14	10PR/LRE	15.6	26 on 7.0	9.5	6-8	27.9	20	740
	AE142709TM	27X9.00R14	10PR/LRE	17.5	27.4 on 6.0	8.5	5-7	29.0	20	715
	AE142710TM	27X10.00R14	10PR/LRE	17.5	27.4 on 7.0	9.5	6-8	29.5	20	785
	AE142711TM	27X11.00R14	10PR/LRE	17.5	27.5 on 8.0	10.2	7-9	31.9	20	855
	AE142810TM	28X10.00R14	10PR/LRE	17.3	28.2 on 7.0	9.3	6-8	31.2	20	855
	AE142910TM	29X10.00R14	10PR/LRE	17.3	28.9 on 7.0	9.3	6-8	33.0	20	880
	AE143010TM	30X10.00R14	10PR/LRE	17.3	30.5 on 7.0	9.3	6-8	35.4	20	935
	AE143110TM	31X10.00R14	10PR/LRE	17.3	31 on 7.0	9.3	6-8	37.2	20	990
	AE143210TM	32X10.00R14	10PR/LRE	17.3	32.3 on 7.0	9.4	6-8	41.1	20	990
15	AE153010TM	30X10.00R15	10PR/LRE	17.3	30.4 on 7.0	9.2	6-8	35.4	20	910
	AE153110TM	31X10.00R15	10PR/LRE	17.3	31 on 7.0	9.4	6-8	37.0	20	990
	AE153210TM	32X10.00R15	10PR/LRE	17.3	32.3 on 7.0	9.5	6-8	39.8	20	1050
	AE153310TM	33X10.00R15	10PR/LRE	17.3	32.9 on 7.0	9.6	6-8	41.1	20	1140
	AE153510TM	35X10.00R15	10PR/LRE	17.4	34.9	9.9	6-8	47.0	20	1235

True specifications achieved after mounting for 24-72 hours.

The **GBC Terra Master** allows you to customize your set up to match the terrain along with your driving style. Featuring two distinct tread patterns, you can alternate sides for better traction in either hard or soft-to-intermediate terrains. The Terra Master's profile is optimized for fierce straight-line traction and its side bite gives you greater cornering control. A lightweight steel-belted carcass provides a strong core and greater wear resistance without weighing you down. In addition, the Terra Master meets DOT standards.



■ **ASYMMETRICAL TREAD PATTERN**
FOR DUAL BENEFITS AND
PERFORMANCE CHARACTERISTICS

■ **STEEL BELTED RADIAL DESIGN**
FOR STRONGER CORE AND GREATER
WEAR RESISTANCE

■ **10-PLY RATED CONSTRUCTION**
FOR ENHANCED DURABILITY

■ **MEETS DOT STANDARDS**

■ **NON-DIRECTIONAL**
FOR EXCELLENT RESPONSIVENESS
IN ANY DIRECTION



SIDE B

Recommended
mounted out for
intermediate to hard
terrain

SIDE A

Recommended
mounted out for soft to
intermediate terrain



MONGREL

CHAMPIONSHIP

PROVEN PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AM122308MG	23X8.00R12	6PR	15.6	23.4 on 6.0	8.0	6.5	19.3	20	495
	AM122310MG	23X10.00R12	6PR	13	23.3 on 7.0	9.6	6-8	22.5	20	615
	AM122508MG	25X8.00R12	10PR	20	25.3 on 7.0	8.19	5-7	23.7	20	600
	AM122510MG	25X10.00R12	10PR	20	25.3 on 7.0	9.45	6-8	27.0	20	715
	AM122610MG	26X10.00R12	10PR	21	26.4 on 7.0	9.1	6-8	28.6	20	760
	AM122709MG	27X9.00R12	10PR	20	27.3 on 7.0	8.9	6-7	28.7	20	760
	AM122711MG	27X11.00R12	10PR	20	27.4 on 7.0	10.2	7-9	31.4	20	855
14	AM142610MG	26X10.00R14	10PR	17	25.9 on 7.0	9.6	6-8	26.4	20	740
	AM142709MG	27X9.00R14	10PR	20	27.4 on 7.0	8.7	6-7	28.0	20	715
	AM142711MG	27X11.00R14	10PR	19.5	27.6 on 7.0	9.7	7-9	30.8	20	855
	AM142810MG	28X10.00R14	10PR	19.5	28.5 on 7.0	9.1	6-8	31.0	20	855
	AM143010MG	30X10.00R14	10PR	19.5	30.6 on 7.0	9.4	6-8	36.8	20	935
	AM143210MG	32X10.00R14	10PR	19.5	32.5 on 8.0	10.1	6-8	40.7	20	1070
15	AM152810MG	28X10.00R15	10PR	20	28.7 on 7.0	9.3	6-8	29.6	20	825
	AM153010MG	30X10.00R15	10PR	19	30.7 on 7.0	9.0	6-8	37.8	20	910
	AM153210MG	32X10.00R15	10PR	19	32.4 on 7.0	9.6	6-8	41.5	20	1050

True specifications achieved after mounting for 24-72 hours.

The **GBC Mongrel** is built to handle today's UTV/SXS that feature greater horsepower and speed capabilities. Sporting 10-ply rated radial construction to support larger max loads and a reinforced sidewall for greater puncture resistance, the Mongrel is ready to overcome the toughest off-road obstacles. Its full coverage tread pattern wraps around the tire creating a rounded profile that increases performance and responsiveness. In addition, the Mongrel's tread promotes self-cleaning to maintain maximum traction in a variety of terrains.




■ **AGGRESSIVE TREAD**
FOR SUPERIOR TRACTION

■ **REINFORCED SIDEWALL**
FOR GREATER PUNCTURE RESISTANCE

■ **10-PLY RATED CONSTRUCTION**
FOR ENHANCED DURABILITY

■ **MEETS DOT STANDARDS**

■ **TREAD DESIGNED**
FOR ALL TYPES OF TERRAIN

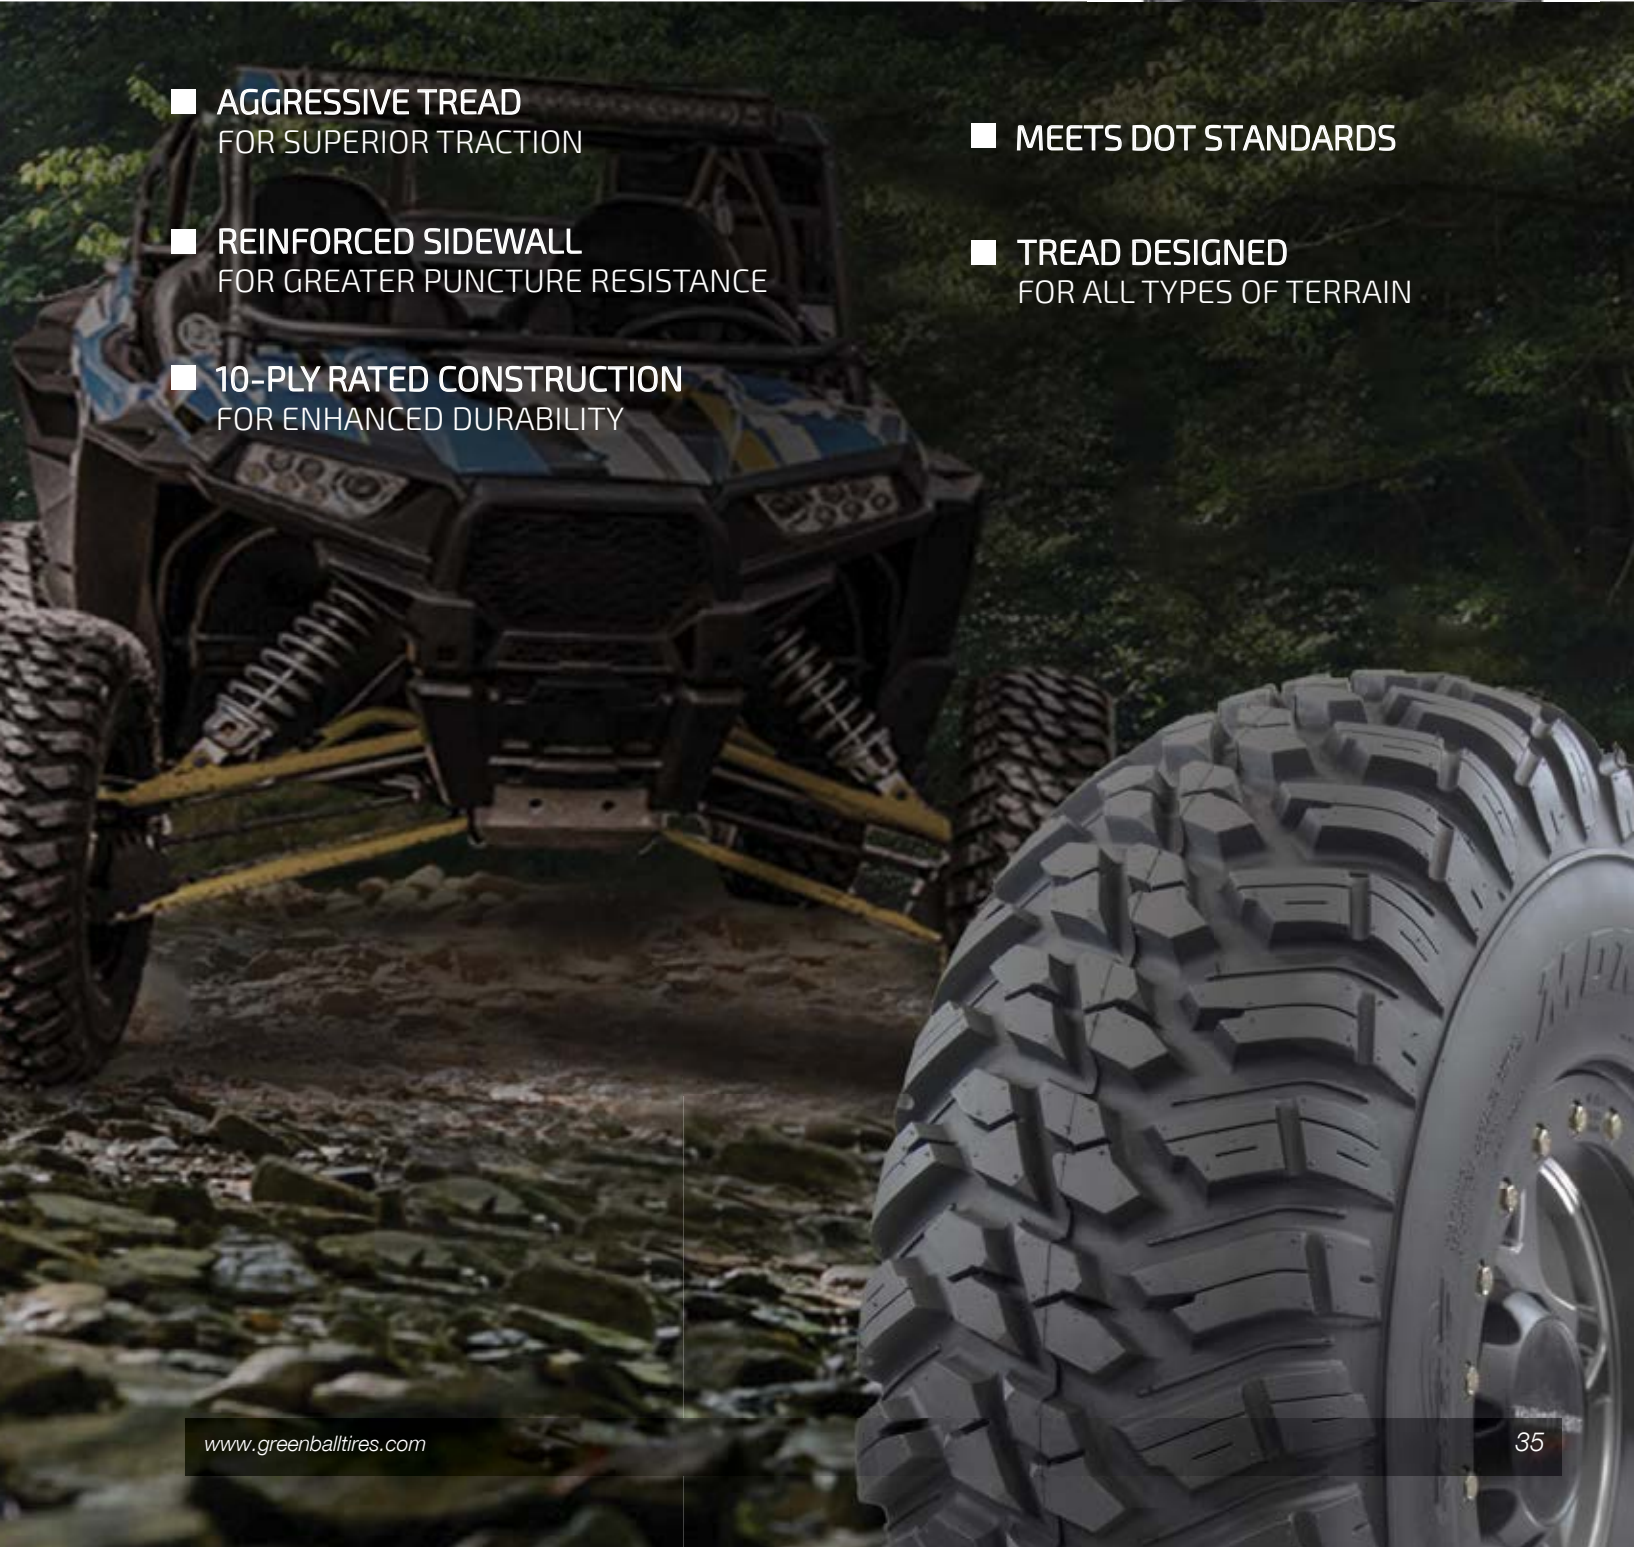



DIRT COMMANDER 2.0

GBC'S NEW RADIAL SXS TIRE FOR 2021

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
14	AER142810DC2	28X10.00R14	8PR	23.0	27.7 on 7.0	8.9	6.5	36.6	32	1050
	AER142909DC2	29X9.00R14	8PR	22.0	29.5 on 6.0	9.1	6.5	32.4	35	1280
	AER142911DC2	29X11.00R14	8PR	22.0	29.5 on 8.0	10.7	8.0	34.1	35	1480
	AER143010DC2	30X10.00R14	8PR	21.5	29.7 on 7.0	9.5	6.5	37.6	35	1310
15	AER153210DC2	32X10.00R15	8PR	23.0	31.7 on 7.0	9.6	7.0	38.3	35	1430
	AER153310DC2	33X10.00R15	8PR	23.0	32.7 on 7.0	9.6	7.0	43.1	35	1520
	AER153510DC2	35X10.00R15	8PR	23.0	34.7 on 7.0	9.9	7.0	47.4	35	1735

True specifications achieved after mounting for 24-72 hours.

The All-New **Dirt Commander 2.0** is GBC's newest SXS tire that features a bold redesign of the popular Dirt Commander. The 2.0 showcases a strong square shoulder profile that maintains grip and bite even during extreme speeds and cornering. Plus, the sidewall protection is even greater than before, courtesy of the elongated sidewall lugs, which enable you to power through tight paths and obstacles with confidence. The flatter profile across the tread face allows maximum acceleration and braking power, even in the most challenging conditions. GBC also redesigned the tread blocks for easier clean-out and added deeper sipes for greater tread flex. The Dirt Commander 2.0 is ready to take on all kinds of adventures, from rocky trails and desert driving to soft and intermediate terrains.

It's time to take your ride to the next level with the Dirt Commander 2.0!



- **MEETS DOT STANDARDS**
- **RADIAL CONSTRUCTION**
PROVIDES A SMOOTH RIDE
- **BALANCED VOID RATIO**
PROVIDES EXCEPTIONAL GRIP
IN ALL TERRAINS
- **SQUARE SHOULDER PROFILE**
FOR MAXIMUM ACCELERATION
AND BRAKING POWER
- **LONG SIDE LUGS**
FOR ENHANCED
SIDEWALL PROTECTION





DIRT COMMANDER

LEADING THE WAY
THROUGH TOUGH TERRAINS

GBC DIRT COMMANDER ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122508DC	25X8.00-12	8PR	27	25.2 on 7.0	8.2	5-7	20.5	7/12	340/480
	AE122510DC	25X10.00-12	8PR	27	25.2 on 7.0	9.5	6-8	25.9	7/12	420/580
	AE122609DC	26X9.00-12	8PR	27	25.7 on 7.0	8.75	6-7	23.7	7/12	410/570
	AE122611DC	26X11.00-12	8PR	27	25.8 on 7.0	10	7-9	27.1	7/12	480/680
	AE122709DC	27X9.00-12	8PR	26	27.7 on 6.0	8.5	6-7	25	20	750/920
	AE122711DC	27X11.00-12	8PR	26	27.8 on 8.0	10.6	7-9	29.3	20	780/960
	AE122810DC	28X10.00-12	8PR	27	27.9 on 7.0	9.6	6-8	29.3	20	855
14	AE142609DC	26X9.00-14	8PR	27	26.0 on 7.0	8.5	6-7	23.4	7/14	700/1000
	AE142611DC	26X11.00-14	8PR	27	26.0 on 7.0	9.7	7-9	28.2	7/14	730/1045
	AE142709DC	27X9.00-14	8PR	27	27.0 on 7.0	8.5	6-7	24.6	20	750/1075
	AE142711DC	27X11.00-14	8PR	27	27.0 on 7.0	10	7-9	29.4	20	780/1120
	AE142909DC	29X9.00-14	8PR	26	29.5 on 6.0	8.5	5-7	28.2	20	925
	AE142911DC	29X11.00-14	8PR	26	29.6 on 8.0	10.4	7-8	33	20	985
	AE143010DC	30X10.00-14	8PR	26	30.6 on 7.0	9.8	6-8	33.7	20	1050
	AE143210DC	32X10.00-14	8PR	27	32 on 7.0	9.6	6-8	36.2	20	1070
15	AE153010DC	30X10.00-15	8PR	26	30.8 on 7.0	9.5	6-8	38	20	890

GBC DIRT COMMANDER RADIAL CONSTRUCTION (OEM REPLACEMENT)

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AER122709DC-Y	27X9.00-R12	8PR	26	27.24	8.46	6-7	28.60	12	341
	AER122711DC-Y	27X11.00-R12	8PR	26	27.36	10.6	7-9	32.78	14	440

A super-tough, puncture-resistant 8-ply rated bias tire, **The Dirt Commander** offers the perfect lug depth for optimal performance in all types of conditions. The deep siped tread design offers superior traction that allows the Dirt Commander to tear into rocks, mud, dirt, creek beds, grass, hills, and steep rock ledges. Additionally, mud easily cleans off the Dirt Commander to prevent loss of traction.




■ SUPER TOUGH AND PUNCTURE RESISTANT

■ 8-PLY RATED BIAS CONSTRUCTION

■ DEEP SIPES
FOR GREATER TRACTION

■ BITING EDGES
FOR GREATER STABILITY AND CONTROL

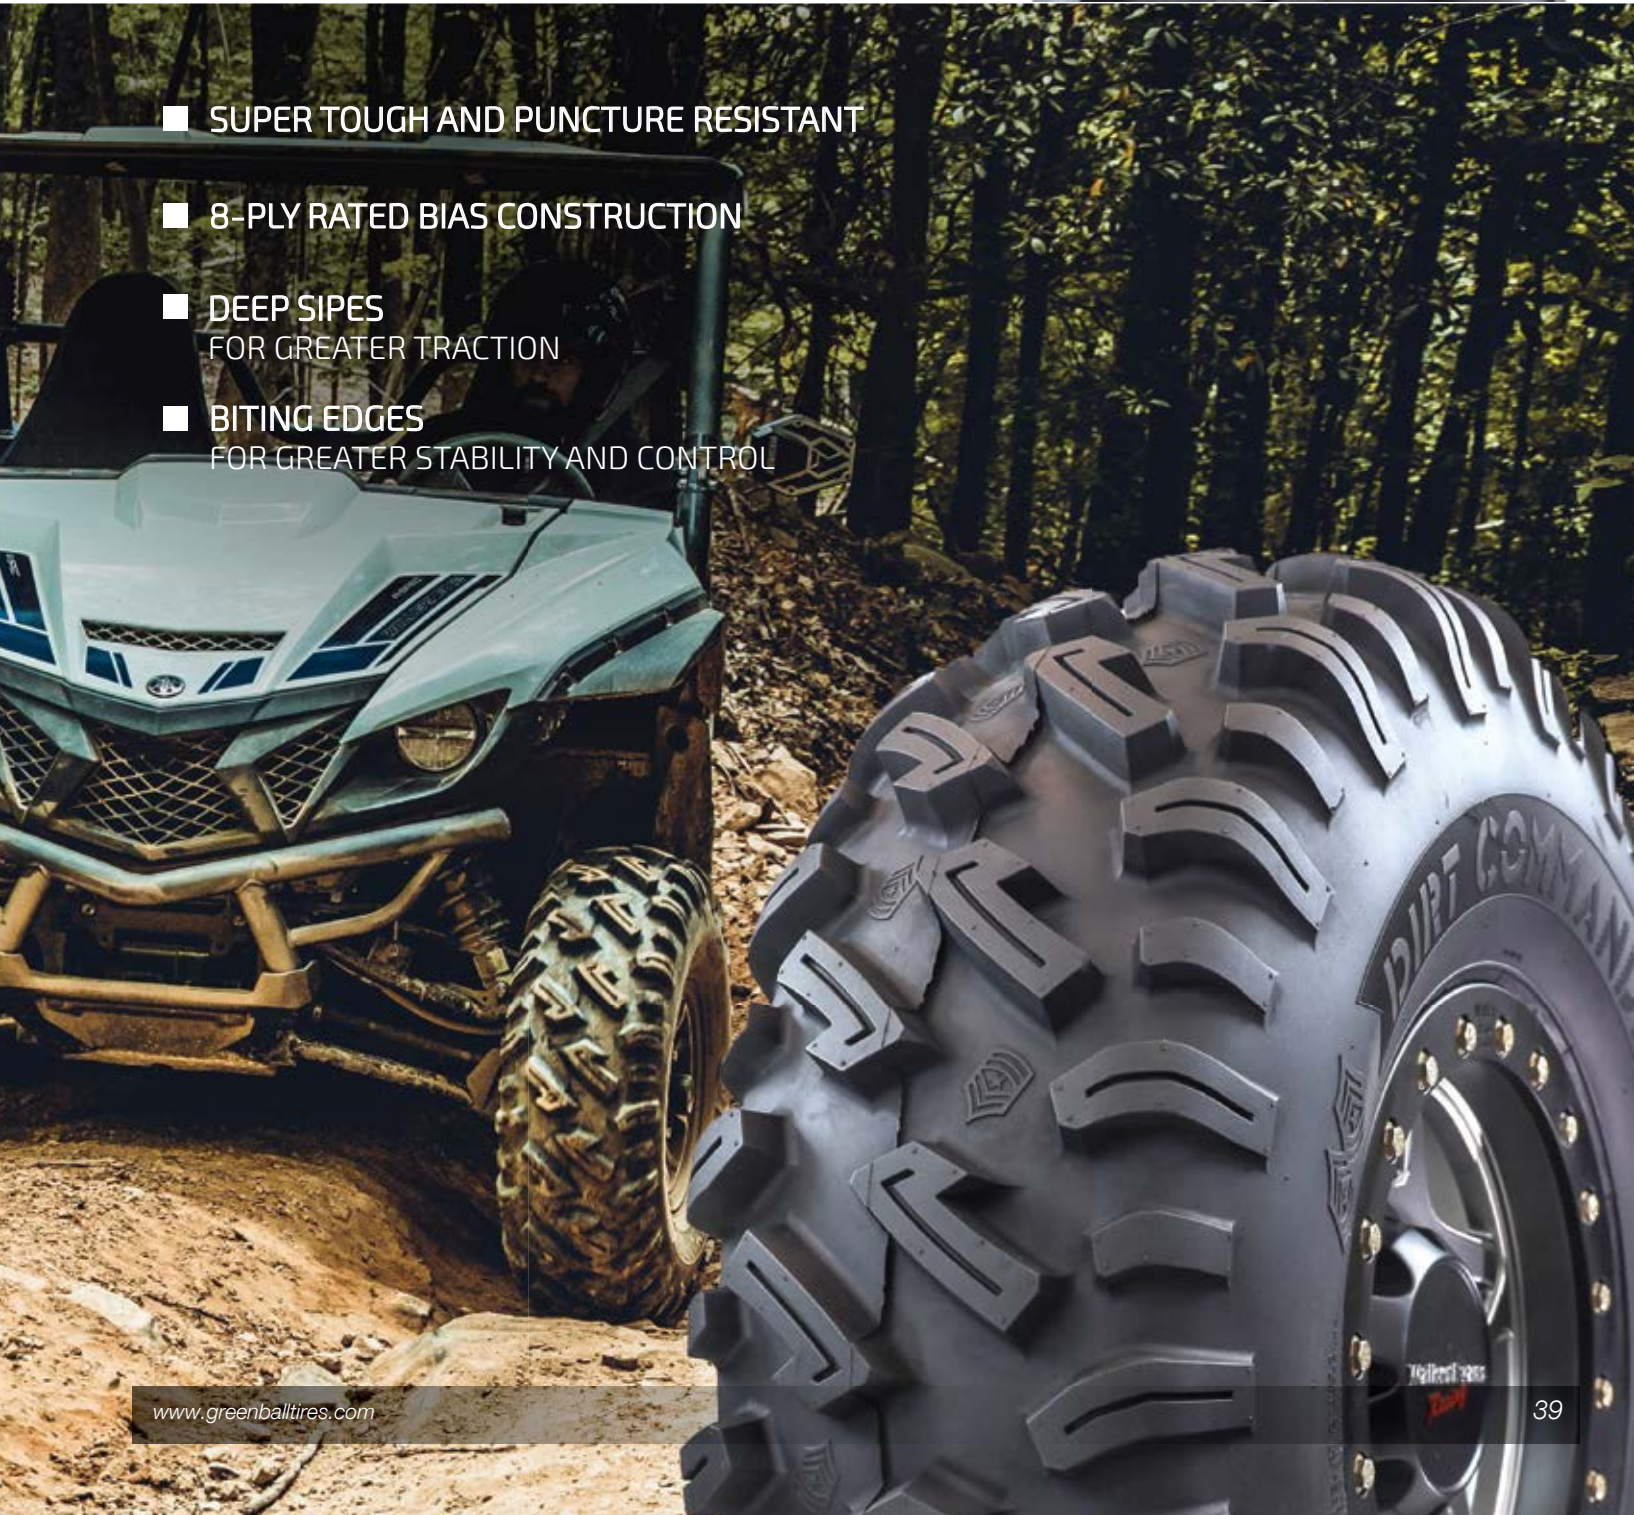



GRIM REAPER

- 8-PLY RATED RADIAL CONSTRUCTION
- DEEP WRAP-AROUND LUGS
- SUPERIOR PERFORMANCE IN SOFT TERRAIN
- HIGH RESISTANCE TO PUNCTURES

GRIM REAPER ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122508GR	25X8.00R12	8PR	27	25.0 on 7.0	8.3	5-7	21.9	7/12	340/480
	AE122510GR	25X10.00R12	8PR	27	25.0 on 7.0	9.4	6-8	25.8	7/12	420/580
	AE122609GR	26X9.00R12	8PR	27	26.0 on 7.0	9.6	6-7	27.1	7/12	440/595
	AE122611GR	26X11.00R12	8PR	27	26.0 on 7.0	10.8	8-9	32.7	7/12	520/735
14	AE142609GR	26X9.00R14	8PR	29	26.2 on 7.0	8.3	6-7	26.5	7/14	700/1000
	AE142611GR	26X11.00R14	8PR	29	26.2 on 8.0	10.7	7-9	31.5	7/14	730/1045
	AE142709GR	27X9.00R14	8PR	29	27.0 on 7.0	9.0	6-7	27.9	7/14	750/1075
	AE142711GR	27X11.00R14	8PR	29	27.0 on 7.0	10.4	7-9	32.6	7/14	780/1120
	AE142810GR	28X10.00R14	8PR	29	28.0 on 7.0	9.6	6-8	31.5	20	1200
	AE143010GR	30X10.00R14	8PR	29	30.0 on 7.0	9.6	6-8	36.2	20	1360
	AE143210GR	32X10.00R14	8PR	29	32.0 on 7.0	9.8	6-8	41.8	20	1520

True specifications achieved after mounting for 24-72 hours.

SPARTACUS



- DEEP LUGS FOR EFFICIENT CLEAR-OUT
- ADDED BLOCKS FOR GREATER GROUND CONTACT
- DIRECTIONAL TREAD FOR BETTER FORWARD TRACTION
- 8-PLY RATED RADIAL CONSTRUCTION

SPARTACUS ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122508SP	25X8.00R12	8PR	27	25.0 on 7.0	8.3	5-7	22.1	7/12	340/480
	AE122510SP	25X10.00R12	8PR	27	25.0 on 7.0	9.4	6-8	25.3	7/12	420/580
	AE122610SP	26X10.00R12	8PR	27	25.0 on 7.0	9.6	6-8	27.4	7/12	440/595
	AE122612SP	26X12.00R12	8PR	27	26.0 on 7.0	10.8	8-10	31.4	7/12	520/735
14	AE142709SP	27X9.00R14	8PR	29	27.0 on 7.0	9.0	6-7	27.4	7/14	750/1075
	AE142711SP	27X11.00R14	8PR	29	27.0 on 7.0	10.4	7-9	33.3	7/14	780/1120
	AE142810SP	28X10.00R14	8PR	29	27.9 on 7.0	9.6	6-8	31.4	20	1200
	AE143010SP	30X10.00R14	8PR	29	30.0 on 7.0	9.6	6-8	35.6	20	1360
	AE143210SP	32X10.00R14	8PR	29	32.0 on 7.0	9.8	6-8	39.0	20	1520

True specifications achieved after mounting for 24-72 hours.



DIRT DEVIL

- ECONOMICAL UPGRADE
- GREAT TRACTION IN VARIOUS TERRAINS
- WIDE RANGE OF POPULAR SIZES

DIRT DEVIL ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	AR0898	22X11.00-8	6PR	20	22.3 on 8.5	10.9	7-9	21.5	7	395
9	AR0937	22X11.00-9	6PR	20	22.5 on 8.0	10.8	7-9	21.6	7	395
	AR0938	25X12.00-9	6PR	20	25.2 on 9.5	11.6	8-10	23.9	7	496
10	AR1028	22X8.00-10	6PR	20	21.9 on 5.5	8	5-7	14.2	7	275
	AR1018	22X11.00-10	6PR	20	22.2 on 9.0	10.7	7-9	19.9	7	385
	AR1029	23X8.00-10	6PR	20	23.4 on 5.5	8.3	5-7	15.4	7	300
	AR1019	23X10.00-10	6PR	20	23.4 on 10.0	10.2	6-8	19.8	7	375
	AR1060	24X11.00-10	6PR	20	24.0 on 8.0	11.1	7-9	22.3	7	440
	AR1068	25X12.00-10	6PR	20	24.8 on 9.0	11.7	8-10	24.9	7	495
11	AR1160	23X8.00-11	6PR	20	23.4 on 7.0	7.6	5-7	14.5	7	290
	AR1104	24X8.00-11	6PR	20	24.0 on 7.0	8.1	5-7	17.4	7	320
	AR1103	24X9.00-11	6PR	20	23.8 on 7.0	8.6	6-7	19.1	7	365
	AR1161	24X10.00-11	6PR	20	24.2 on 7.0	10.1	6-8	21.4	7	395
	AR1165	25X10.00-11	6PR	20	25.2 on 7.0	10	6-8	23.1	7	430
12	AR1228	25X8.00-12	6PR	20	25.2 on 7.0	8.3	5-7	19.3	7	340
	AR1230	25X10.00-12	6PR	20	24.4 on 7.0	9.9	6-8	20.2	7	420
	AR1201	26X10.00-12	6PR	39	25.9 on 7.0	9	6-8	24.4	7	460
	AR1202	26X12.00-12	6PR	39	25.9 on 8.0	11.4	8-10	30.8	7	520
	AR1212	27X12.00-12	6PR	39	26.9 on 8.0	11.4	8-10	32	7	550

True specifications achieved after mounting for 24-72 hours.

AFTERBURN



- DESIGNED FOR SMOOTH AND COMFORTABLE RIDE
- IDEAL FOR STRAIGHT LINE RACING AND HIGH SPEED CORNERING
- BALANCED CONSTRUCTION FOR LIGHT WEIGHT DURABILITY

GBC AFTERBURN ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122508AB	25X8.00R12	8PR	17	25.4 on 7.0	8.4	5-7	17.4	7	340
	AE122510AB	25X10.00R12	8PR	17	25.4 on 7.0	9.4	6-8	22.8	7	420
	AE122608AB	26X8.00R12	8PR	17	26.0 on 7.0	8.3	5-7	18.6	7	460
	AE122610AB	26X10.00R12	8PR	17	26.0 on 7.0	9.4	6-8	23.1	7	560

True specifications achieved after mounting for 24-72 hours.

AFTERBURN STREETFORCE

- MEETS DOT STANDARDS FOR STREET USE
- AGGRESSIVE TREAD FOR BOTH WET AND DRY CONDITIONS

GBC AFTERBURN STREET FORCE ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
12	AE122508SF	25X8.00R12	4PR	10	24.9 on 7.0	8.1	5-7	19.9	15	500
	AE122510SF	25X10.00R12	4PR	10	24.6 on 8.0	10.0	6-8	21.7	12	500
14	AE142609SF	26X9.00R14	4PR	10	26.1 on 8.0	8.6	6-7	21.8	18	725
	AE142611SF	26X11.00R14	4PR	10.5	26 on 8.0	10.7	7-9	25.8	18	850
	AE142709SF	27X9.00R14	4PR	10	27.1 on 8.0	8.6	6-7	22.9	18	750
	AE142711SF	27X11.00R14	4PR	10.5	27 on 8.0	10.7	7-9	27.1	18	850

True specifications achieved after mounting for 24-72 hours.



XC-MASTER

- **X-KNOB TREAD**
FOR SUPERIOR HANDLING AND CONTROL
- **DURABLE PUNCTURE RESISTANT CASING**
TO TAKE ON THE TOUGHEST TERRAINS

GBC XC-MASTER ATV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
9	AR092011XM	20X11.00-9	6PR	15	20.0 on 9.0	11.0	7-9	16.9	7	341
	AR092211XM	22X11.00-9	6PR	15	22.0 on 9.0	11.2	7-9	19.8	7	397
10	AR102011XM	20X11.00-10	6PR	15	20.0 on 8.0	10.8	7-9	17.6	5	330
	AR102107XM	21X7.00-10	6PR	15	21.3 on 5.5	7.0	3.5-5.5	12.0	7	235
	AR102207XM	22X7.00-10	6PR	15	22.0 on 5.5	6.9	3.5-5.5	13.7	7	255
	AR102211XM	22X11.00-10	6PR	15	22.4 on 8.0	10.8	7-9	19.2	7	386
	AR102307XM	23X7.00-10	6PR	15	23.0 on 5.5	7.0	3.5-5.5	13.8	7	275

True specifications achieved after mounting for 24-72 hours.

GROUND BUSTER III

- **DESIGNED**
FOR INTERMEDIATE TO HARD TERRAIN
- **2-PLY RATED VERSION**
FOR USE WITH FLAT PREVENTION SYSTEMS
- **6-PLY RATED VERSION**
FOR GREATER PUNCTURE RESISTANCE

GBC GROUND BUSTER III ATV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
9	AR092011GBA	20X11.00-9	2PR	16.4	20.59	10.75	7-9	14.9	7	240
	AR092011GBC	20X11.00-9	6PR	16.4	20.67	10.71	7-9	15.4	7	340
	ARGBC9201106	20X11.00-9	6PR	14.0	19.92	11.38	7-9	15.3	7	342
	ARGBC9211106	21X11.00-9	6PR	14.0	20.75	11.42	7-9	17.2	7	364
10	ARGBC1021706	21X7.00-10	6PR	15.0	20.79	6.85	3.5-5.5	11.2	7	234
	ARGBC1022706	22X7.00-10	6PR	15.0	21.77	6.89	3.5-5.5	12.1	7	254

True specifications achieved after mounting for 24-72 hours.

XC-RACER



- **REINFORCED BEAD**
FOR ADDED STRENGTH
- **MULTI-TIERED PRE-GROOVED LUGS**
FOR BETTER TRACTION
- **PERFECT FOR X-COUNTRY RACING**



XC-RACER ATV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
9	AE092011XR	20X11-9	6PR	15	19.6 on 9.0	11	7-9	16.5	7	350
10	AE102107XR	21X7-10	6PR	15	20.8 on 5.5	7	3.5-5.5	12.0	7	250

True specifications achieved after mounting for 24-72 hours.

- **ENGINEERED FOR MINI ATV XC AND**
ATV MX APPLICATIONS
- **X-TYPE LUG**
FOR BETTER HOOK UP AND TRACTION
- **SOFT YET DURABLE COMPOUND**
TO HELP CONFORM TO SURFACES
AND TERRAINS

MINI MASTER



MINI MASTER ATV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
8	AE081808MM	18X8.00-8	2PR	15	18	8.3	7	11.5	5	182
	AE081810MM	18X10.00-8	4PR	15	18	10	8	12.9	10	210
10	AE101906MM	19X6.00-10	2PR	11	19	6.1	5	9.1	5	148
	AE102006MM	20X6.00-10	4PR	11	20	6.1	5	9.4	10	235

True specifications achieved after mounting for 24-72 hours.

BATTLE BORN



Designed for YOUTH UTV/SXS

- DIRECTIONALLY DESIGNED GROOVED X-KNOBS FOR FRONT AND REAR APPLICATIONS
- FRONT TIRE ENGINEERED FOR OPTIMAL HANDLING AND CONTROL
- REAR TIRE ENGINEERED FOR OPTIMAL DRIVE AND BRAKING

GBC BATTLE BORN ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
10	AE102307BB	23X7.00-10	4PR	15	22.8	6.8	5.0	13.5	7	275
	AE102308BB	23X8.00-10	4PR	15	23.0	7.8	6.0	13.8	7	310

True specifications achieved after mounting for 24-72 hours.

MINI MONGREL

Designed for YOUTH UTV/SXS

- AGGRESSIVE TREAD FOR MAXIMUM TRACTION IN A VARIETY OF TERRAINS
- NARROWER FRONT ENGINEERED FOR OPTIMAL HANDLING
- REAR SIZE OFFERS WIDER CONTACT PATCH FOR IMPROVED DRIVE POWER

GBC MINI MONGREL ATV/UTV TIRES

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.
10	AM102307MJ	23X7.00-10	6PR	15	22.9	6.9	3.5-5.5	16.4	7	275
	AM102308MJ	23X8.00-10	6PR	15	22.9	8.0	5.0-7.0	17.7	7	310

True specifications achieved after mounting for 24-72 hours.



UTV/ATV TIRES

GBC TIRE PERFORMANCE CHART

TIRE	SPORT ATV	UTILITY ATV	UTV/ SXS	ROCKY TRAIL/ DESERT	GENERAL TRAIL/ RIDING	SOFT TERRAIN	DEEP MUD	DUNES/ LOOSE SAND	X-COUNTRY RIDING	MX CLOSED COURSE	STREET/ HARD SURFACE
TERRA MASTER											
MONGREL											
GRIM REAPER											
SPARTACUS											
DIRT COMMANDER											
DIRT COMMANDER 2.0											
DIRT DEVIL											
AFTERBURN											
AFTERBURN STREET FORCE											
XC - MASTER											
MINI MASTER											
XC - RACER											
GROUND BUSTER III											
MINI MONGREL											
BATTLE BORN											

EXCEPTIONAL PERFORMANCE

VERY GOOD PERFORMANCE

NOTES



TERMS & CONDITIONS

1. **Payment:** Net 30 days from invoice date on approved credit.
2. **Shipments:** Shipments under 3000 lbs. will be freight collect.
3. **Shipments:** Over 3000 lbs. to one location will be freight prepaid.* Any additional drop-off charge for multiple location shipments will be prepaid, with drop off charges added to the invoice.
4. **Returns:**
 - a) No returns will be accepted unless issued a Return Authorization Number by Greenball Corporation. Material returned without authorization will not receive any credit.
 - b) Returns must be received within ten (10) days of receipt of shipment. Customer must ensure that returned products are packaged and returned in their original condition.
 - c) Non-defective material will incur a 20% restocking fee.
 - d) Special orders and discontinued items cannot be returned.
 - e) No credit can be issued until Greenball Corporation inspects returned product. Credit will be issued at original invoice price only.
5. **Claims:** Shortage claims, error or defect in shipment must be made within 72 hours of receipt of goods. Claims for damage or loss in transit must be made directly with the carrier.
6. **Prices:** Prices and terms subject to change without notice.
7. **FedEx Special Handling Charge:** Oversized orders will be charged a \$7.00 additional handling fee from our standard rate.

*Weight minimum for freight prepayment subject to change due to outside (external) influences.
You may confirm minimum weight with any customer service personnel.

WARNING

Tire Mounting can be dangerous if not done by trained personnel using proper tools and equipment. For your own safety, seller recommends that users have tires and inner tubes changed by an experienced service provider.

Greenball Corporation strives to ensure the accuracy of all information contained in this catalog. However, misprints, inaccuracies, omissions and other errors may occur. Greenball Corporation does not take responsibility for any errors, misprints, omissions or any other inaccuracies found herein; including but not limited to product information specifications or item availability. All Greenball brand tires are subject to continuous development and design. Greenball Corporation reserves the right to change construction, materials, or specifications without notice of obligation.

LIMITED WARRANTY

Greenball Corporation warrants its products, to the original purchaser only, against failure due to factory defective materials and workmanship for four years from the date of manufacture, or two years from invoice date of purchase verified by the original invoice or copy thereof. All request for claims and tire inspections must be submitted through the proper Greenball Corporation Warranty channels.

*For Tow-Master® Radial series, please see Tow-Master® Radial warranty pamphlet for complete information.

Greenball Corporation makes no expressed claims of expected tire wear. Variables that affect tire wear include but not limited to driving/riding conditions, load and pressure, under/over inflation and improper mounting.

*Other limitations and exceptions apply. Please contact a Warranty Specialist for complete information.

What is not covered by the Warranty?

- Greenball Corporation does not pay for mounting, balancing, or labor. Greenball Corporation does not cover loss of time, inconvenience, loss of use of vehicle, costs of towing or transportation or consequential damages of any nature.
- Tires/wheels which have been patched, plugged or repaired or on to which liquid balancers or sealants have been applied. Patching, repairing of tires, or applying any sealants on tire will automatically VOID any warranty.
- Failure, damage or irregular wear caused by misalignment or any other mechanical causes.
- Failure, damage or irregular wear caused by driving in violation of SPEED, LOAD, or TEMPERATURE RATINGS.
- Failure due to fire, accident, malicious mischief, improper inflation, improper use, running flat, overloading or road hazards. Examples of road hazards include nails, glass and other foreign objects and natural/man-made defects or obstacles such as excavations, construction, potholes and chuckholes. Damages caused by road hazards include cuts snags, punctures, scuffs, carcass bruises and impact breaks.
- Premature or irregular wear due to improper inflation or alignment.
- Tires used in racing or competition.

For questions or to file a claim, please contact our Warranty Specialists at 1-866-767-9637.
Please see our warranty brochure for complete information.

To register your tires please visit www.greenball.com/support/tire-registration



GBC
POWERSPORTS TIRES



LOCATIONS

CORPORATE HEADQUARTERS
222 S. HARBOR BLVD. SUITE 700
ANAHEIM, CA 92805
TEL: 714-782-3060
FAX: 714-782-7052

WEST COAST DISTRIBUTION
12197 DAVIS STREET
MORENO VALLEY, CA 92557
TEL: 800-946-9412
FAX: 714-782-7075

**ACCOUNTS SERVICES/
ORDER DESK**
TEL: 800-946-9412
FAX: 714-782-7075

**EAST COAST
DISTRIBUTION CENTER**
4300 HUNTER ROAD
ATLANTA, GA 30349
TEL: 800-946-9412

WARRANTIES/RETURNS
TEL: 866-767-9637
FAX: 714-782-7074